

## LTMG940

### MULTIBAND SURFACE MOUNT ANTENNA

#### PRODUCT OVERVIEW

The LTMG940 is a 5-cable antenna with 4x LTE, NO WiFi and 1x GNSS. With 5-elements, the LTMG940 antenna provides a good match for the dual carrier modems that contain two pairs of LTE MIMO elements, one pair for each carrier. These fleet management systems offer Cellular carrier back-up.

The LTMG940 covers all Global Cellular & LTE frequencies. It also covers CBRS, Private LTE, and 5-G ready. GNSS operates on GPS, Galileo, Glonass, QZSS or Beidou.

Specify LTM940 for a model configured with GPS only.


Visit our [eStore](#) to purchase an Antenna Online.

Electrical Specifications		
Frequency & Gain	LTE Cables 1 - 4	694 - 960 MHz, 2 dBi 1710 - 3700 MHz, 5 dBi
	GNSS Cable 5	1561, 1575, & 1602 MHz, LNA 26 dB, 5 dBi (RHCP)
VSWR	LTE	< 2.5:1 VSWR Over Range (with 12" LMR-100)
Impedance	50 Ohm Nominal	
Power Rating	10 Watts	
GNSS	Amplifier Bias Voltage	2.7 to 5 VDC
	Gain	26 dB +/- 3 dB
	Current	20 mA max, 10 mA typical

Mechanical Specifications		
Radome Material & Color	ASA UV-Inhibitive Plastic, Available in Black or White	
Radome Base Material	Corrosion Resistant Aluminum	
Radome Dimension	5.50" (139 mm) in Diameter & 2.38" (60 mm) in Height	
1ft (304.8 mm) Pigtail Cables & Connectors Exiting Antenna	LTE	LMR-100 with SMA Plugs LTE-A (Green) & LTE-B (Red)
	GNSS	RG-174 with SMA Plug (Yellow)
Including 14ft (4.26 m) Jumper Cables & Connectors	LTE	LL-195 with SMA Jack & SMA Plugs LTE-A (Green) & LTE-B (Red)
	GNSS	RG-174 with SMA Jack & SMA Plug (Yellow)
Operating Temperature	-40° to +80° C	
Mounting	7/8" (22 mm) Dia. Feed Through 3/4" (19 mm) lg. Thread for up to 1/2" (13 mm) Thick Surface	
Shock & Vibration	IEEE-1478, EN 61373, MIL-810G, TIA 329.2-C	
Dust & Water Ingress	IP69K (Stud Mount, When Properly Mounted)	
	IP67 (Mag-Mount, When Properly Mounted)	
RoHS Compliant	Yes	



L T M G 9 4 0 - A 3 C B 3 C 0 0 G 2 C - W H T - 1 8 0

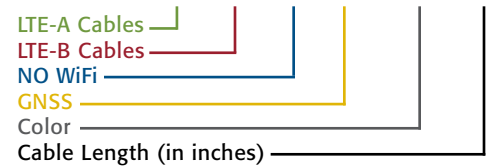

#### HIGHLIGHTS:

- Multiband: 4x LTE, NO WiFi, 1x GNSS
- Dual-Carrier MIMO, Covers 617 - 3700 MHz
- 1 ft Cable Pigtails Exit Antenna; 14 ft Cable Jumpers Provided
- Color Coded Cable Type for EASY Match-Up
- Made-in-the-USA & UK

#### RELATED MODELS:

- LTMWG940 (Wider 5G Freq)
- LTMG944 (4x WiFi)
- LTMG943 (3x WiFi)
- LTMG942 (2x WiFi)
- LTMG941 (1x WiFi)
- LTM940 (GPS Model)

#### COMMON APPLICATIONS:

- Vehicle Fleet Management
- Multiband Modems
- Public Transportation



US Headquarters +1.847.671.6690 • US/CA Toll Free +1.800.648.2800  
European Facility +44.1543.459555 • [www.MobileMark.com](http://www.MobileMark.com)

Moving Wireless Forward®