

LLPG208

MULTIBAND SURFACE MOUNT ANTENNA

PRODUCT OVERVIEW

The 2-cable LLPG208 (1x Global 5G/LTE and 1x GNSS) antennas include one Global 5G Sub-6 LTE antenna and one GNSS antenna. The GNSS element operates on GPS, Galileo, Glonass, QZSS, or Beidou at 1561, 1575, & 1602 MHz.


This Global LTE antenna covers: 617-960 & 1710-6000 MHz. In the US, this includes the CBRS (Citizens Broadband Radio Service) at 3.55-3.7 GHz, Band 71 at 617-698 MHz, and all C-Band Frequencies from 3.4-4.2 GHz. If you are looking for a low-profile 5G Ready antenna, this is the solution you've been looking for!

The LLPG208 takes up less space than multiple antennas and is effective in applications where tall vehicles have specific height restrictions. Otherwise, it is used in Fixed Site Applications where vandalism is a risk.

Visit our [eStore](#) to purchase an Antenna Online.

Electrical Specifications		
Frequency & Gain	5G/LTE Cable 1	617 - 700 MHz, 1 dBi 700 - 960 MHz, 3 dBi 1700 - 2700 MHz, 4 dBi 3400 - 4200 MHz, 6 dBi 4900 - 6000 MHz, 6 dBi
	GNSS Cable 2	1561, 1575, & 1602 MHz, LNA 26 dB, 5 dBi (RHCP)
VSWR	< 2.5:1 VSWR	
Impedance	50 Ohm Nominal	
Power Rating	10 Watts	
GNSS	Amplifier Bias Voltage	2.7 to 5 VDC
	Gain	26 dB, 5 dBi
	Current	20 mA max, 10 mA typical

Mechanical Specifications	
Radome Material & Color	ASA UV-Inhibitive Plastic, Available in Black or White
Radome Dimension	9.00" (228 mm) x 3.50" (89 mm) x 1.25" (31.8 mm) in Height
Standard Connectors	SMA Plugs (Male)
Cables	15 Feet (4.5 m) Cables: LL-195 for LTE/5G & WiFi, RG-174 for GNSS, Other Lengths Available
Operating Temperature	-40° to +80° C
Mounting	Thru Hole, Ground Plane Dependent
Shock & Vibration	IEEE-1478, EN 61373, MIL-810G, TIA 329.2-C
Dust & Water Ingress	IP69K (Stud Mount, When Properly Mounted)
RoHS Compliant	Yes

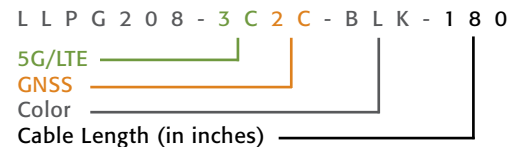

HIGHLIGHTS:

- Multiband: 1x 5G Sub-6, 1x GNSS
- Cellular Coverage 617-6000 MHz
- Low Profile
- Made-in-the-USA & UK

RELATED MODELS:

- LLP208 (GPS Model)
- LLPG308 (2x 5G Sub-6 & 1x GNSS)
- LMWG203 (1x 5G/LTE, 1x GNSS)

COMMON APPLICATIONS:

- Advanced Multiband Modems
- Tall Vehicles with Height Restrictions
- Fixed Site with Vandalism Risks



US Headquarters +1.847.671.6690 • US/CA Toll Free +1.800.648.2800
European Facility +44.1543.459555 • www.MobileMark.com

Moving Wireless Forward®